

A close-up photograph of a person's hands using a VPACK handheld tape dispenser to seal a cardboard box. The dispenser is white and blue, with a large roll of yellow tape. The person is wearing a dark blue long-sleeved shirt. The background is a blurred warehouse or factory floor with wooden pallets.

MANUFACTURE AND DISTRIBUTION

The VPACK logo, featuring a stylized red 'V' with a green triangle inside, followed by the word 'PACK' in red, with a green triangle inside the 'A'. A green horizontal line is positioned below the logo.

VPACK

COMPANY PROFILE

The business of **VPACK**, formerly **D'Afrique Trading International** was founded in 2010.

The business focused on the development of pressure sensitive adhesive tapes which were sourced from China under the proprietary brands, D'AFRIQUE (Standard) and ORANGE TAPE (Premium).

The **ORANGE TAPE** brand, established in 2015, was born out of the idea to introduce the first Orange coloured masking tape for the panel-beating industry. This was well received in the industry, as it was correctly perceived as "better than yellow"!

At the same time, we also introduced Orange as a new coloured packaging tape to South Africa.

The D'Afrique brand was sold in late 2018, when we secured the agency and distribution of various Italian manufacturers of adhesive tape bulk materials and BOPP film.

Accordingly in 2019, substantial investment was made in the business, which was transferred to the new company, VPACK.

This included the purchase of multiple machines to produce the majority of our finished products.

Our raw material principals are major market players globally in Pressure Sensitive Self-Adhesive Tapes utilising: HOT MELT, SOLVENT and ACRYLIC technologies

Accordingly, today **VPACK** offers multiple grades of :

- Masking Tape – 6 grades from Economy General Purpose up to Ultimate Performance Masking that is fully UV and Waterproof. Our masking range, services the DIY/Construction, Automotive, Shop-fitting, Events and other industries
- Pre-taped Masking Film
- Duct and Gaffer Tapes – Utility and Heavy Duty,
- Double Sided Tapes – GDA, RDA, EVA and PE Mounting Tapes, VHB and PET.
- Packaging Tapes – Clear, Buff, White and all primary colours including Plain and Custom Printed rolls
- Speciality Tapes – Filament, Fine Line Tape, PVC Bag sealing, Dry wall joint, floor marking tape and other
- Thermal and Semi-gloss Labels – both plain and Printed, including Foamtac
- Non-adhesive Printed Polypropylene wrap-around labels and packaging
- Polymeric Extra High Tack Vinyl for dome label printing

VPACK carry for our customers a large range of packaging materials:

- Bubble Wrap
- Aerothene
- Pallet Wrap
- Plastic bags and sheets
- Cardboard Boxes, Sheets and corrugated board

From humble beginnings, **VPACK** has grown its market share to become a force to be reckoned with in the South African Adhesive Tape and Packaging Industry.

We look forward to the continued servicing of our loyal customers with the best product available at the best value for money.



Icon Key



Superior performance



Automotive



High temperature



Hard to stick surfaces



High adhesion



UV resistant



Easy tear



Heavy duty



Vertical mounting



High tensile strength



Interior



Moisture resistant



Reinforcing / bundling



Splicing / temporary fixing



Acrylic water based



Infra Red Resistant



High tack



Packaging and shipping



UV resistant



Manual sealing



Residue free



Stationery



Automatic Sealing



Easy removable



Day 3



Synthetic Rubber
(Hot Melt)



High resistant



Day 7



Natural rubber



Interior/exterior



Easy print





PACKAGING TAPES



Backing	BOPP
Colour	Clear Buff
Adhesive	Acrylic water based
Total thickness	40 µm
Holding Power to stainless steel	≥ 24 hours
Tensile strength	70 N/25mm
Elongation at break	126%
Initial Tack (Rolling Ball Test)	# 15 ball

Packaging Tape - Acrylic (Standard)

7823



For everyday sealing of cartons, plastic and general packing.



Packaging Tape - Acrylic (Super)

7824



For sealing of medium weight cartons, plastic and general packing.

Backing	BOPP
Colour	Clear Buff
Adhesive	Acrylic water based
Total thickness	44 µm
Holding Power to stainless steel	≥ 24 hours
Tensile strength	74 N/25mm
Elongation at break	120%
Initial Tack (Rolling Ball Test)	# 18 ball



PACKAGING TAPES continued



Hand Carton Sealer

We carry various dispensers suitable for 45mm to 72mm Tape widths

Total thickness
Holding Power to stainless steel
Tensile strength
Elongation at break
Initial Tack (Rolling Ball Test)

Backing
Colour
Adhesive

Packaging Tape - Acrylic (Premium)

7825



Aggressive initial tack
For sealing of medium to heavy weight cartons. Also, more suitable for recycled cartons.

BOPP
Clear | Buff
Acrylic water based

48 µm
≥ 24 hours
78 N/25mm
115%
24 ball



Packaging Tape - Colour Acrylic (Premium)

8048



Aggressive initial tack
For automatic sealing of all weight cartons. Also, more suitable for recycled cartons.

BOPP
Clear | Buff
Acrylic water based

48 µm
≥ 24 hours
78 N/25mm
115%
24 ball



PRINTED Packaging Tape Acrylic (Premium)

7825
7300



- Standard Warning and Fragile Tape
- Custom Printing:
Up to 3 COLOURS on WHITE, CLEAR, BUFF, BLUE, GREEN, ORANGE, RED or YELLOW Film.

BOPP
Clear | Buff
Acrylic water based

48 µm
≥ 24 hours
78 N/25mm
115%
24 ball



PACKAGING TAPES continued

Packaging Tape Kraft (Paper)

1401



Eco-friendly Carton Sealing Paper Packaging Tape with a natural rubber resin adhesive. Easy to unwind and hand tear-able. FSC® certified. Disposable together with the box on which it is applied without affecting the paper and cardboard recycling process. (INGEDE procedure)

Backing	Consistent crepe paper
Colour	Brown Kraft
Adhesive	Natural Rubber resin
Total thickness	115 µm
Adhesion to steel	2.4 N/cm
Tensile strength	35 N/cm
Elongation at break	7%



Packaging Tape Gum (Water Activated)

9072
9150



VPACK 9150 is a 100% fully recyclable / environmentally friendly product. Reinforced with 110 (1 1 1 1 1) plant-based yarn. Aggressive initial tack Suitable for sealing of all virgin and recycled cartons.

Kraft paper
Brown Kraft – Plain
Brown Kraft - Reinforced
Starch Adhesive
140 µm (Reinforced)
225 N/25mm



PVC Carton & Bag Sealing Tape

5712



Heavy duty carton sealing. Also shopping bag & bread bag neck sealing Product identification or colour coding. Printable Excellent for frozen storage

PVC
Black Green Orange
Blue Red Yellow White
Natural Rubber
58.0 micron
5.5 kg/cm
80%



MASKING TAPES

General Purpose Economy

1680



Backing
Colour
Adhesive

Saturated semi-crepe paper
Yellow
Natural rubber and
cross-linked resins

115 µm

Adhesion to steel

2.7 N/cm

Tensile strength

32 N/cm

Elongation at break

7%

Working temperature range

60 °C for 30 minutes

Removal time

24hrs residue free (indoor)

Suitable for indoor painting and renovation, and non-critical bundling, holding, splicing, and labelling. Capable to exposure ultra-violet (UV) light for 5 hours.



General Purpose Premium

1060 |
1360



Saturated semi-crepe paper
Kraft Brown
Natural rubber and cross-
linked resins

125 µm

3.0 N/cm

36 N/cm

7%

60 °C for 30 minutes

3 days residue free (indoor)

A great multi-application masking tape. Sticks to a variety of surfaces and stays positioned. Outstanding paint lines and perfect contours. Also used for wrapping and sealing. Exposure to UV light for 5 hrs.



High Temperature Automotive

1380



Saturated semi-crepe paper
Yellow
Natural rubber and cross-
linked resins

125 µm

2.7 N/cm

34 N/cm

7%

80 °C for 30 minutes

3 days residue free (indoor)

Professional automotive and general high temperature masking tape. Excellent edge definition with high resistance to paint bleed through.



Hi-Temp Premium Performance

1080



Saturated semi-crepe paper
Kraft Brown
Natural rubber and cross-
linked resins

130 µm

2.5 N/cm

36 N/cm

7%

90 °C for 60 minutes

5-7 days residue free (indoor)

Premium high temp masking tape. For water and solvent based paints Capable in overlapping the tape with masking paper and masking film with excellent holding power. Extremely high permeability. Suitable for Infra Red Curing



DUCT, GAFFER & FILAMENT TAPES

Duct Tape

2650



Backing

Colour

Adhesive

Total thickness

Adhesion to steel

Tensile strength

Elongation at break

Polyethylene laminated synthetic cloth + fibres
Black, Blue, Green, Red, Silver, White, Yellow
Synthetic rubber and resins
175 µm
> 7 N/cm
> 32 N/cm
10%

For sealing, holding, labelling, and temporary repairs. UV, sunlight and humidity resistant.



Gaffer Tape Standard

2800




Polyethylene coated cloth + fibres

Black, White

Synthetic rubber and resins
250 µm
> 8 N/cm
12 kgf/25mm
10%

70 Mesh matte cloth for use in exhibition, events, theatre and film industries. For sealing, holding, labelling, and temporary repairs. UV and humidity resistant.

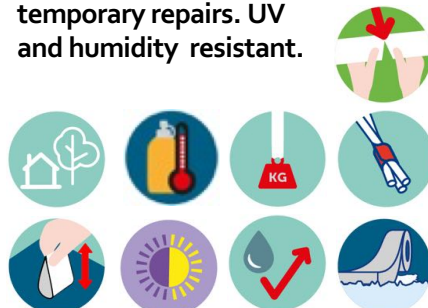

Gaffer Tape Premium

2900



Polyethylene coated cloth + fibres

Black, White

Natural rubber solvent
300 µm
> 10 N/cm
14 kgf/25mm
10%

High quality heavy duty 80 Mesh matte cloth with long Term residue free removal. For use in exhibition, events, theatre and film set. UV and humidity resistant.



Filament Tape

9605



BOPP Reinforced with longitudinal glass fibre

Clear

Synthetic rubber
140 µm
1000 g/cm
570 N/25mm
3%

For extra heavy-duty carton sealing
For bundling of steel rods, tubes etc
For palletising
Waterproof sealing



DOUBLE-SIDED TAPES


Double-sided Carpet Tape - GDA

4000



Backing	Polyester fabric
Liner	Mustard siliconised paper
Adhesive	Synthetic rubber resin
Total thickness	180 µm
Adhesion to steel	10 N/cm
Tensile strength	30 N/cm
Elongation at break	15%

High adhesion, white polyester fabric double sided tape suitable for sealing of carpets and heavy-duty applications requiring aggressive tack. Hand tear-able

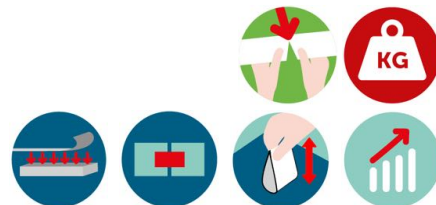

Double-sided Polyprop - Filmic RDA

4500



OPP Film	
Light yellow glassine liner	
Solvent Acrylic	
120 µm	
>120min (holding power)	
>13 N/25mm (peel strength)	

Excellent contact on flat surfaces. Ideal for bonding of fabrics, paper and plastic materials where a high initial tack and strong peel adhesion is required.



Double-sided EVA Foam Mounting Tapes

4016 & 4003



EVA foam	
Blue PE film liner	
Solvent Acrylic	
1.6mm / 3mm	
>12 hours 23 °C (holding power)	
>15 N/25mm (peel strength)	

Mounting of paintings, posters, photos, public notices. Securing of Motor vehicle number plates, hooks, signboards, ornaments.



DOUBLE-SIDED TAPES continued

Backing
Colour
Adhesive
Total thickness
Adhesion to steel
Tensile strength

Double-sided PE foam
Auto-trim Badge Mount

(4306,
4312,
4318)



PE foam
Black
Acrylic solvent adhesive
0.6mm / 0.8mm
15N/25mm each side

Mounting motor vehicle badges, beadings and reflectors, rear view mirrors, 3rd brake lights & hooks, signboards, ornaments



VHB Acrylic
Foam - Clear

4100



Clear acrylic foam
Transparent
Acrylic solvent based
1 mm
1100g/cm
0.8kg/cm

Ideal for both indoor and outdoor applications with very good resistance to aging, UV rays, humidity and thermal shock. Our VHB range are characterized by strong shear and strong holding power even on materials with different surface characteristics.



VHB Acrylic Foam
Black & Grey

4120



Black acrylic foam
Black Grey
Acrylic solvent based
1.2mm
1300 g/cm
0,8 kg/cm

4100: Transparent - Particularly suitable for substrates with medium-high surface energy like metals, PVC, PU, PET and painted surfaces.
4120: Black & Grey - Particularly suitable for substrates with medium-low surface energy like Polycarbonate, metals, vinyls and phenolic Resins.



DOUBLE-SIDED TAPES continued

Double-sided Polyester Filmic Tape

4400




Backing	PET Film
Colour	Transparent with Red MOPP
Adhesive	Liner
Total Thickness	Natural rubber
Adhesion to steel	205.0 micron
Holding Power	16 N/25mm
Tensile Strength	>24 hours 1000g/6.4cm ³

Double-sided PET Filmic tape is used for mounting of ABS plastic parts in the car industry, rubber/EPDM profiles, decorative profiles and moulding in the furniture industry, battery packs, lenses and touch-screens in electronic devices etc. High transparency and waterproof.

SPECIALITY TAPES

Fibreglass Drywall Joint Tape

6808-
DWJ

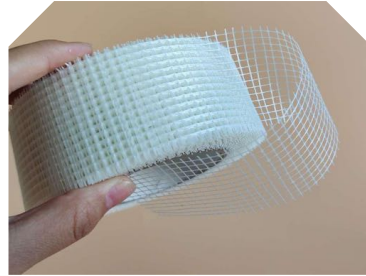

Backing	Fibreglass Mesh 8*8
Colour	White
Adhesive	Water based Acrylic
Total thickness	63 g/m ² (Warp 8 Weft 8)
Adhesion to steel	
Tensile strength	400 N/5cm
Elongation at break	
Service Temperature Range	

Fibreglass Drywall joint mesh tape is widely used for drywall finishing and joining. Also for repair of cracks and covering of holes in drywalling, plasterboard, stucco and other surfaces.

Pre-taped Masking Film

1444



Washi Tissue Paper + HDPE Film
Neon Green (tape)
Natural rubber
95 µm (tape) 7-11 µm (film)
2.5 N/25mm
50 N/25mm
11%
110 °C for 30 minutes

Anti-static masking film pre-taped with premium high temp luxury washi paper masking tape. For water and solvent based paints Professional automotive and general high temperature application with excellent holding power. No Penetration. Easy Tear.

PVC Fine Line Tape

1800-PVC-
FL150



Plasticised PVC Film
Dark Blue
Natural rubber
120 µm
0.5kg / 25mm
≥ 1.3kg/10mm
150%
150 °C for 50 minutes

Masking protection for mag wheels, complex curved lines, sharp curves, irregularly shaped panels, over rivets and into seams.

Very strong, with high mechanical strength and adhesion. It has a temperature resistance of 150C for 60+ minutes. Removable without any adhesive residue.

